


SECTION C-C

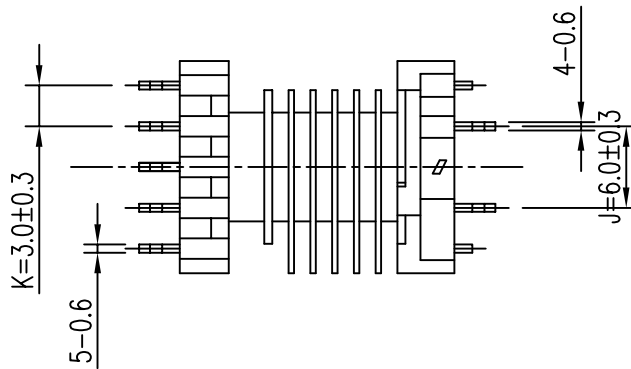

| | | | | | |
|---|--|--|--|--|--|
| 4 | | | | | |
| 3 | | | | | |
| 2 | | | | | |
| 1 | | | | | |

| MARK | | | REVISION NOTE | | | DATE | DRAWN | CHECKED | APPROVED |
|--|--------------|---------------|---|--|-------------------|--|-------|--------------|----------|
| DRAWN | CHECKED | APPROVED | MATERIAL : L.C.P | | UL REC. : UL94V-0 | THIRD ANGLE PROJ. | | SCALE : NONE | |
| Hye Lan, Hwang | Hun Hee, Son | Dong Kon, Lee | Z : PIN LENGTH (According to customer's request) | | DATE : 2001,08,31 | TOLERANCE : ±0.2 (Unless otherwise specified) | | UNIT : m/m | |
| 주식회사 대흥보빈 DAE HEUNG BOBBIN CO., LTD | | | TITLE EFD 16*16 BOBBIN(FSM 1616) | | | DWG NO DH-010831-7002-01 | | | |