



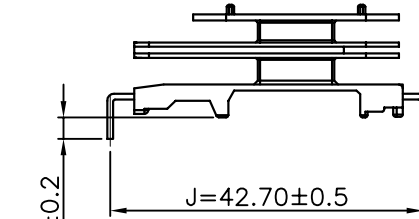

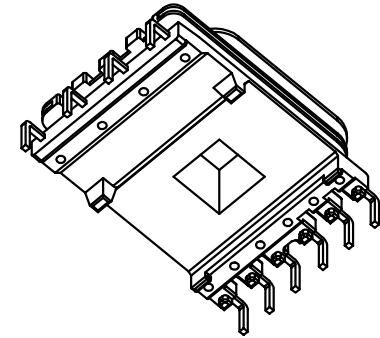
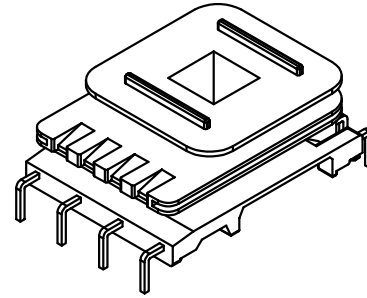
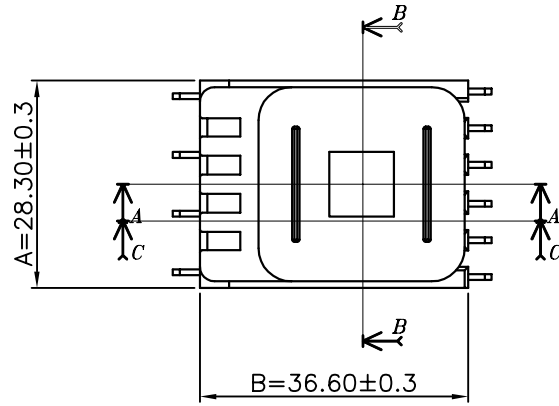


TOLERANCE	
$0 \leq L \leq 4$	$\pm 0.1$
$4 \leq L \leq 16$	$\pm 0.2$
$16 \leq L \leq 50$	$\pm 0.3$
$50 \leq L \leq 63$	$\pm 0.4$
$63 \leq L \leq 75$	$\pm 0.5$
$75 \leq L \leq 100$	$\pm 0.7$



SECTION B-B

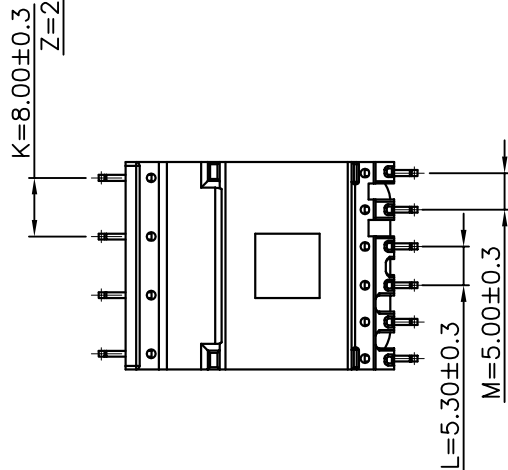

SECTION C-C

SECTION A-A

MARK	REVISION NOTE	DATE	DRAWN	CHECKED	APPROVED
△					
△					
△					
DRAWN	CHECKED	APPROVED	MATERIAL : LCP	UL REC. : UL94V-0	THIRD ANGLE PROJ. SCALE : 1/1
HK, Yang	SH, Kim	C, Park	Z : PIN LENGTH (According to customer's request)	DATE : 2015.12.15	TOLERANCE : ±0.2 (Unless otherwise specified) UNIT : m/m
주식회사 대흥보빈 DAE HEUNG BOBBIN CO., LTD			TITLE		DWG NO
			EED 33*17 "V" (10P) 3F		DH-160720-2059-08