



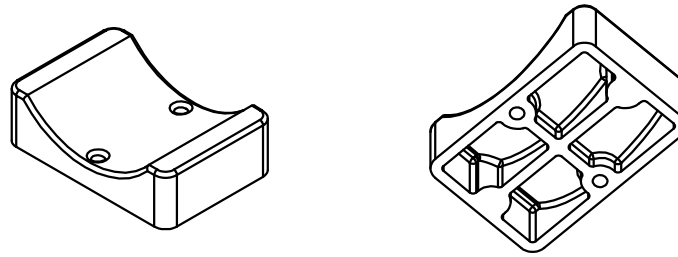
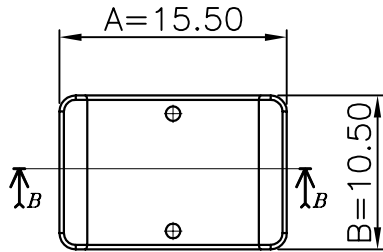


TOLERANCE	
0≤L≤4	±0.1
4≤L≤16	±0.2
16≤L≤50	±0.3
50≤L≤63	±0.4
63≤L≤75	±0.5
75≤L≤100	±0.7



SECTION A-A

E=2-φ1.00



SECTION B-B

MARK	REVISION NOTE			DATE	DRAWN	CHECKED	APPROVED
△							
△							
△							
	DRAWN	CHECKED	APPROVED	MATERIAL : P.B.T (30%)-BK UL REC. : UL94V-0	THIRD ANGLE PROJ.	SCALE : 1/1	
	MS, Kim	KM, Seo	C, Park	Z : PIN LENGTH (According to customer's request)	DATE : 2015.11.05	TOLERANCE : ±0.2 (Unless otherwise specified)	UNIT : m/m
	주식회사 대흥보빈 DAE HEUNG BOBBIN CO., LTD			TITLE OR 15φ BASE 2H		DWG NO DH-151203-8655-00	